




Product Name	Type of LED/K Color	Size	Grid Type	Optic	Mounting Clips	Color
TBSL = T-BAR LED	HW = Warm White 3000K MW = Medium Warm 3500K MN = Medium Neutral 4000K HN = Neutral White 4500K	6 = 600mm 12 = 1200mm 12L = 1200mm L 6G = 625mm 12G = 1225mm 12LG = 1225mm L	24 = T24 15 = T15 15B = T15 Bolt Slot 24C = T24 Concealed Grid	D = Diffusing Lens C = Cut-Off Reflector* A2 = Asymmetric B = Block Clear Diffusing Lens B2 = Block Frosted Diffusing Lens S = Acrylic Signage	U = Universal A = Armstrong C = Custom	W = White C = Custom

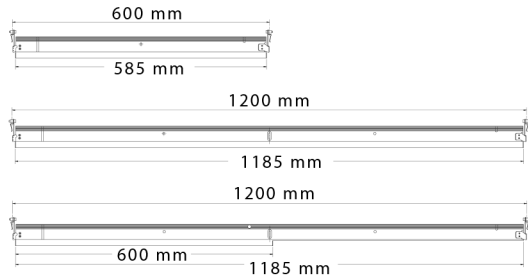


T15 Length Sizes

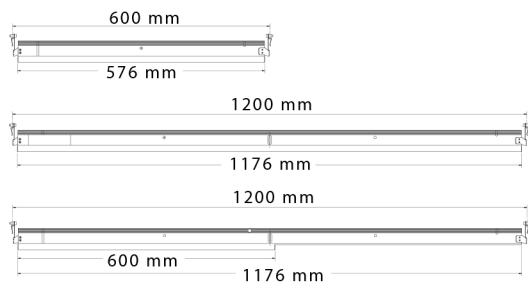


T24 Length Sizes

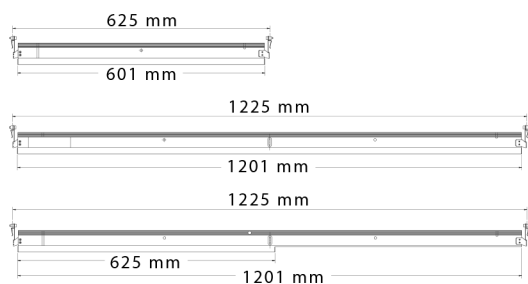

T15 German Length Sizes

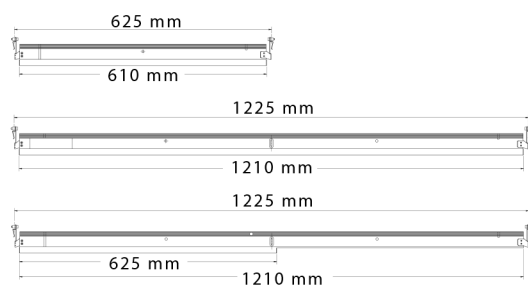

T24 German Length Sizes

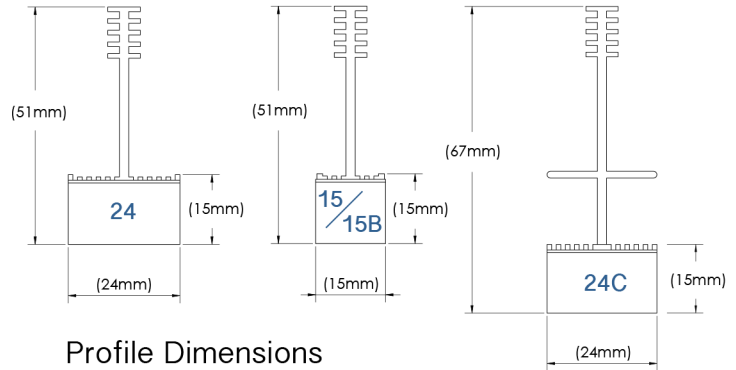

Profile Dimensions

CRI = >82

**NOTES:**

T-BAR LED modules can be parallel connected up to 3.6 linear meters max per power supply. Remote power supply includes JB compartment for AC input direct wiring. Max distance from power supply to fixtures is 9 meters with 18 AWG wire. Longer distance achievable if using higher gauge wire.

\*Cut-off Reflector available in T24 models only.

**APPLICATIONS:**

Executive, Medical, Health, Educational, Retail, Hotels, Airport, Hospitality and any open space areas that require a unique and elegant architectural lighting design.

**MOUNTING:**

Universal mounting brackets are for easy installation to standard T24 or T15 T-Bars of most manufacturers' ceiling suspension systems. Armstrong compatible mounting clips for installation with Armstrong Ceiling T24 Prelude® and Clean Room™, T15 Suprafine®, Silhouette®, Sonata®, and Interlude® suspension systems.

**MATERIALS:**

Anodized and painted aluminum extruded body, steel mounting clips, white PC end caps, high transmitting acrylic PMMA lens (diffusing, asymmetric, block diffusing lens), or high reflectance 98% aluminum coated PC reflectors on each LED for a dark light effect (cut-off reflector).

**ELECTRIC:**

High output LEDs consume 16W total (600mm) or 32W total (1200mm). Power supply consumption not included. Input voltage 24VDC. Class II plenum rated cables at each end equipped with quick connectors to allow multiple modules to be easily connected together (max 3.6 linear meters of product). Use solid copper wire or wire ferrules to fit into quick connectors.

**LIGHT OUTPUT:**

**Diffusing** = 1118lm (T24 600mm) and 766lm (T15 600mm) or 2236lm (T24 1200mm) and 1532lm (T15 1200mm).

**Cut-Off Reflector** = 1133lm (T24 600mm) or 2266lm (T24 1200mm).

**Asymmetric** = 1118lm (T24 600mm) and 875lm (T15 600mm) or 2237lm (T24 1200mm) and 1750lm (T15 1200mm).

**Block Clear Diffusing** = 1026lm (T24 600mm) and 830lm (T15 600mm) or 2052lm (T24 1200mm) and 1660lm (T15 1200mm).

**Block Frosted Diffusing** = 1104lm (T24 600mm) and 931lm (T15 600mm) or 2209lm (T24 1200mm) and 1862lm (T15 1200mm).

**WARRANTY:**

5 years

**LISTINGS:**

ETL/cETLus CE RoHS Indoor use only.

