



KEY FEATURES

- Length options: 328mm / 646mm / 964mm
- Wattage options: 15W / 30W / 40W
- Optical control options: 10° / 24° / 38°
- Housing colour options: White / Black
- Mounting : Power Track
- Light colour options: WW (2700K) / WW (3000K) / NW (4000K)
- LED type: Philips 3030 SMD
- LED chip efficacy : 97 - 110 Lumens per watt
- Fitting efficacy: 77 - 93 Lumens per watt
- Driver type: HEP
- Dimming options : Non-dim / 0-10V / Dali
- Warranty: 5 Years

APPLICATIONS

- Shop and Retail
- Art & Culture

CERTIFICATIONS & FIXTURE RATINGS



ISO9001
CERTIFIED

IP20

5Year
WARRANTY

General Disclaimer

Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+/-5%) of rated value.

Liability Disclaimer

The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.

Copyright © LED Lighting 2019. All Rights Reserved.



CAPE TOWN

| 021 510 0028

| salesCPT@ledlighting.co.za



DURBAN

| 031 566 5786


| salesDUR@ledlighting.co.za



JOHANNESBURG

| 011 450 0494

| salesJNB@ledlighting.co.za

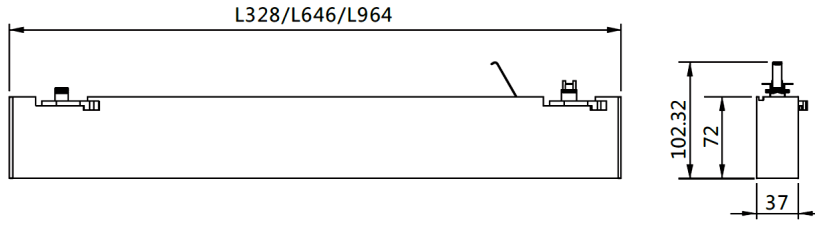

| DIMENSIONS | Name | Draw Power (W) | Length (mm) | Width (mm) | Height (mm) |
|------------|----------------------|----------------|-------------|------------|-------------|
| | TL Linear UGR 03-Pro | 15 | 328 | 37 | 72 |
| | TL Linear UGR 03-Pro | 30 | 646 | 37 | 72 |
| | TL Linear UGR 03-Pro | 40 | 964 | 37 | 72 |
| | | | | | |

GENERAL SPECIFICATIONS

TL LINEAR UGR 03 PRO

| OPTICAL | DESCRIPTION | SPECIFICATION |
|------------------------------------|--|------------------|
| | LED chip type | Philips 3030 SMD |
| | LED operating current (mA) | 350 - 1000mA |
| | LED working life (L70) | 100 000hrs |
| | Driver manufacturer name | HEP |
| | Driver input voltage AC(V) | 220V - 240V |
| | Driver power factor (pf) | >0.92A |
| | Driver manufacture's nominal-life | >50 000hrs |
| | Driver Total Harmonic Distortion (THD) | <20% |
| | Driver surge protection (kV) | 2kV |
| | Driver certification report | EN |
| | IP rating | IP20 |
| | SABS company certification | 10089/15954 |
| | SABS product certification | N/A |
| Operating temperature range | - 20°C to + 40°C | |
| Housing material | Cast Aluminium | |
| Product weight including packaging | +/- 1.1kg | |
| Product weight excluding packaging | +/- 0.95kg | |
| Product warranty | 5 Years | |

General Disclaimer
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+5%) of rated value.

Liability Disclaimer
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.
Copyright © LED Lighting 2019. All Rights Reserved.



CAPE TOWN

| 021 510 0028
| salesCPT@ledlighting.co.za




DURBAN

| 031 566 5786
| salesDUR@ledlighting.co.za



JOHANNESBURG

| 011 450 0494
| salesJNB@ledlighting.co.za

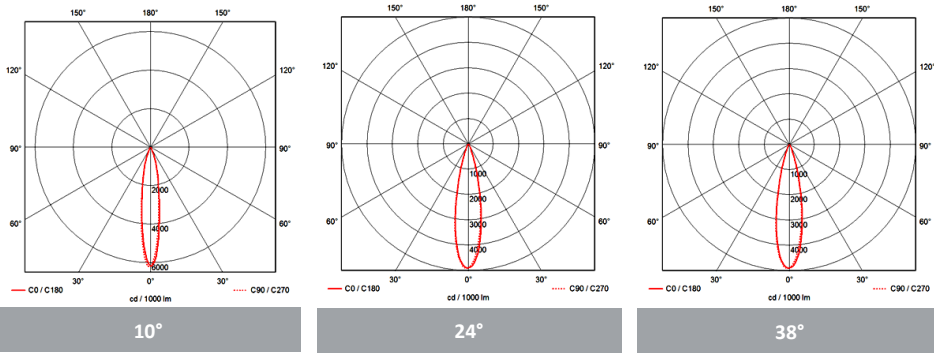

GENERAL SPECIFICATIONS

| Name | Draw Power (W) | LED Colour (cct) | Colour Rendering Index (CRI) | Luminous Flux (lm) | Efficiency (lm/W) | Diffuser / Lens / Reflector |
|----------------------|----------------|------------------|------------------------------|--------------------|-------------------|-----------------------------|
| TL Linear UGR 03-Pro | 15 | WW (2700K) | 80/90 | 1200 | 80 | 10° / 24° / 38° |
| TL Linear UGR 03-Pro | 15 | WW (3000K) | 80/90 | 1300 | 87 | 10° / 24° / 38° |
| TL Linear UGR 03-Pro | 15 | NW (4000K) | 80/90 | 1400 | 93 | 10° / 24° / 38° |
| TL Linear UGR 03-Pro | 30 | WW (2700K) | 80/90 | 2300 | 77 | 10° / 24° / 38° |
| TL Linear UGR 03-Pro | 30 | WW (3000K) | 80/90 | 2400 | 80 | 10° / 24° / 38° |
| TL Linear UGR 03-Pro | 30 | NW (4000K) | 80/90 | 2450 | 82 | 10° / 24° / 38° |
| TL Linear UGR 03-Pro | 40 | WW (2700K) | 80/90 | 3100 | 78 | 10° / 24° / 38° |
| TL Linear UGR 03-Pro | 40 | WW (3000K) | 80/90 | 3150 | 79 | 10° / 24° / 38° |
| TL Linear UGR 03-Pro | 40 | NW (4000K) | 80/90 | 3200 | 80 | 10° / 24° / 38° |

General Disclaimer
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+/-5%) of rated value.

Liability Disclaimer
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.
Copyright © LED Lighting 2019. All Rights Reserved.



CAPE TOWN

| 021 510 0028
| salesCPT@ledlighting.co.za



DURBAN

| 031 566 5786
| salesDUR@ledlighting.co.za



JOHANNESBURG

| 011 450 0494
| salesJNB@ledlighting.co.za