



**KEY FEATURES**

- | Length options: 600 / 1200 / 1500 / 2300
- | Wattage options: 32W / 62W / 78W / 124W
- | Beam Angles: 7 options
- | Housing colour options: White / Black
- | Mounting options: Surface / Suspended / P2000 / Tbar ceiling
- | Light colour options: WW 3000K / WW 3500K / NW 4000K / CW 5700K
- | LED type: Osram Duris 2835 6V
- | LED chip efficacy: 150 - 160 Lumens per watt
- | Fitting efficacy: 132 - 145 Lumens per watt
- | Driver manufacturer name : Tridonic / Vossloh-schwabe / Philips
- | Dimming options: Non-dim / Dali / Bluetooth Low Energy
- | Warranty: 7 Years

**APPLICATIONS**

- | Shop and Retail
- | Health & Care
- | Architectural
- | Art & Culture
- | Hotel & Wellness

**COMPANY CERTIFICATIONS & FIXTURE RATINGS**

**IP20**



**7Year**  
WARRANTY




**General Disclaimer**  
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+5%) of rated value.

**Liability Disclaimer**  
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.  
Copyright © LED Lighting 2019. All Rights Reserved.

**CAPE TOWN**  
| 021 510 0028  
| sales@ledlighting.co.za

**DURBAN**  
| 031 566 5786  
| sales@ledlighting.co.za

**JOHANNESBURG**  
| 011 450 0494  
| sales@ledlighting.co.za

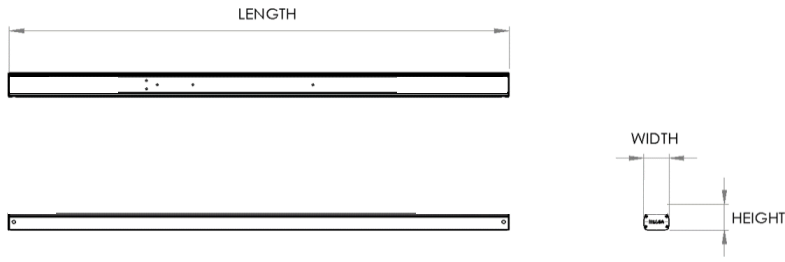

DIMENSIONS	NAME	DRAW POWER (W)	LENGTH (MM)	WIDTH (MM)	HEIGHT (MM)
	GL V2 32W 600	32	569	60	45
	GL V2 62W 1200	62	1132	60	45
	GL V2 78W 1500	78	1414	60	45
	GL V2 124W 2300	124	2257	60	45

GENERAL SPECIFICATIONS

GENERAL SPECIFICATIONS	DESCRIPTION	SPECIFICATION
	LED chip type	Osram Duris 2835 6V
	LED operating current (mA)	87mA
	LED working life (L80 B10)	50 000hrs
	Driver manufacturer name	Tridonic / Vossloh-schwabe / Philips
	Driver input voltage AC(V)	220 – 240 V
	Driver power factor (pf)	>0.95λ
	Driver manufacture’s nominal-life	100 000hrs ( @ Ta = 25°C )
	Driver dimming type	DALI or Bluetooth Wireless
	Driver emergency power option	none
	Driver Total Harmonic Distortion (THD)	<20%
	Driver surge protection (kV)	2kV
	Driver certification report	EN 61347-2-13:2006
	IP rating	IP20
	SABS company certification	10089/15954
	Operating temperature range	- 20deg C to + 40 deg C
	Housing material	Aluminum & PMMA
Impact resistance	IK08	
Product weight including packaging	3.6kg ( 2000mm ) 2.40kg ( 1500mm ) 2kg (1200mm)	
Product weight excluding packaging	3.2kg ( 2000mm ) 2.10kg ( 1500mm ) 1.68kg (1200mm)	
Product warranty	7 Years	


**General Disclaimer**  
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+5%) of rated value.

**Liability Disclaimer**  
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.  
Copyright © LED Lighting 2019. All Rights Reserved.

**CAPE TOWN**  
| 021 510 0028  
| sales@ledlighting.co.za

**DURBAN**  
| 031 566 5786  
| sales@ledlighting.co.za

**JOHANNESBURG**  
| 011 450 0494  
| sales@ledlighting.co.za

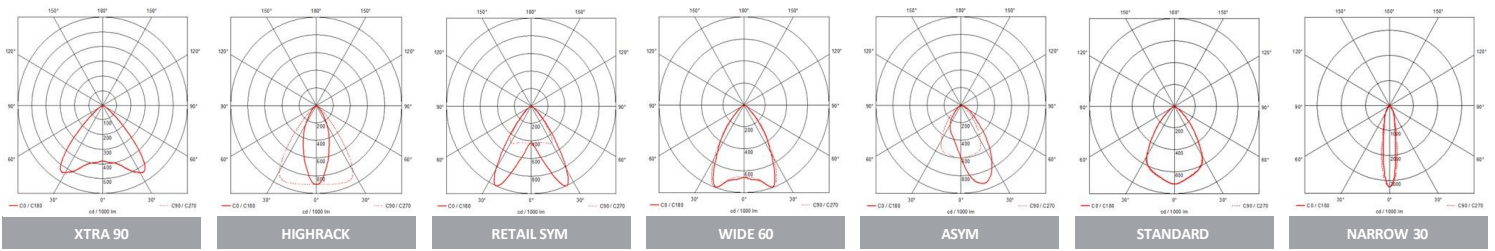

	NAME	DRAW POWER (W)	LED COLOUR (CCT)	COLOUR RENDING INDEX(CRI)	LUMINOUS FLUX (lm)	EFFICIENCY (lm/W)	LENS ANGLE
OPTICAL	GL V2 32W 600	32	3000K / 3500K / 4000K / 5700K	80 - 85	4125 - 4550	135- 145	STANDARD
	GL V2 62W 1200	62	3000K / 3500K / 4000K / 5700K	80 - 85	8250- 8875	135- 145	STANDARD
	GL V2 78W 1500	78	3000K / 3500K / 4000K / 5700K	80 - 85	10300 - 11085	135- 145	STANDARD
	GL V2 124W 2300	124	3000K / 3500K / 4000K / 5700K	80 - 85	16500- 17700	135- 145	STANDARD

**General Disclaimer**  
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+5%) of rated value.

**Liability Disclaimer**  
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.  
Copyright © LED Lighting 2019. All Rights Reserved.

**CAPE TOWN**  
| 021 510 0028  
| sales@ledlighting.co.za

**DURBAN**  
| 031 566 5786  
| sales@ledlighting.co.za

**JOHANNESBURG**  
| 011 450 0494  
| sales@ledlighting.co.za

Suspension Kit		ACC_GLL_GL_SUSP_CL	Suspension moutnung kit. ( 4,5m MAX length )
P2000 brackets		ACC_GL_BRK_P2000_ETE	P2000 trunking brackets & spring nuts
Surface clips		ACC_GLL_GL_SURF_GEN	General surface mounting clips ( excl. anchoring fixtures )
Tbar Ceiling clips		ACC_TBAR_CLIP_1	Mounting clip for Tbar ceiling grid. ( 1pc )

**General Disclaimer**  
 Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+-5%) of rated value.

**Liability Disclaimer**  
 The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.  
 Copyright © LED Lighting 2019. All Rights Reserved.

**CAPE TOWN**

| 021 510 0028  
 | [sales@ledlighting.co.za](mailto:sales@ledlighting.co.za)

**DURBAN**

| 031 566 5786  
 | [sales@ledlighting.co.za](mailto:sales@ledlighting.co.za)

**JOHANNESBURG**

| 011 450 0494  
 | [sales@ledlighting.co.za](mailto:sales@ledlighting.co.za)