



KEY FEATURES

- | Size: 500(D) x 230(H) mm
- | Wattage: 30W / 20W
- | Optical control: Diffuser
- | Housing colour: White inner, various outer
- | Mounting: Suspended
- | Light colour (CCT): WW (3000K) NW (4000K) CW (5700K)
- | LED type: Osram Duris E 2835
- | LED chip efficacy: 120 Lumens per watt
- | Fitting efficacy : 90 Lumens per watt
- | Warranty: 7 Years

APPLICATIONS

- | Office
- | Shop and Retail
- | Education
- | Hotel and Wellness

CERTIFICATIONS & FIXTURE RATINGS

ISO9001
CERTIFIED

IP20

7Year
WARRANTY

General Disclaimer
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+/-5%) of rated value.

Liability Disclaimer
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.
Copyright © LED Lighting 2019. All Rights Reserved.




CAPE TOWN
| 021 510 0028
| sales@ledlighting.co.za



DURBAN
| 031 566 5786
| sales@ledlighting.co.za



JOHANNESBURG
| 011 450 0494
| sales@ledlighting.co.za

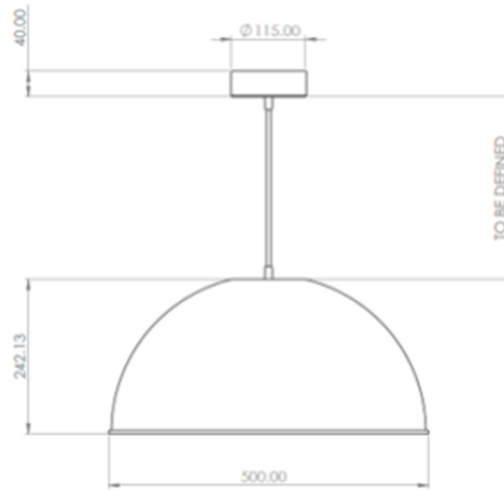

| DIMENSIONS | NAME | DRAW POWER (W) | DIAMETER (MM) | HEIGHT (MM) |
|------------|----------|----------------|---------------|-------------|
| | Luna 30W | 30W | 500 | 230 |
| | Luna 20W | 20W | 500 | 230 |
| | | | | |
| | | | | |

GENERAL SPECIFICATIONS

| OPTICAL | LED chip type | Osram Duris E 2835 |
|---------|--|---------------------------|
| | LED operating current | 20W (500mA) 30W (800mA) |
| | LED working life (L80 B10) | 50 000hrs |
| | IP rating | IP20 |
| | Driver Total Harmonic Distortion (THD) | <20% |
| | Driver surge protection (kV) | 2kV |
| | SABS company certification | 10089/15954 |
| | Operating temperature range | 0° C to + 40° C |
| | Housing material | Powder coated sheet metal |
| | Product warranty | 7 years |


General Disclaimer
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+5%) of rated value.

Liability Disclaimer
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.
Copyright © LED Lighting 2019. All Rights Reserved.

CAPE TOWN
| 021 510 0028
| sales@ledlighting.co.za

DURBAN
| 031 566 5786
| sales@ledlighting.co.za

JOHANNESBURG
| 011 450 0494
| sales@ledlighting.co.za



Luna 30W 4000K

| GENERAL SPECIFICATIONS | DRAW POWER (W) | LED COLOUR (CCT) | COLOUR RENDING INDEX (CRI) | LUMINOUS FLUX (lm) | EFFICIENCY (lm/W) | DIFFUSER |
|------------------------|-----------------------|-----------------------|----------------------------|--------------------|---------------------|---------------------|
| | 30W | 3000K / 4000K / 5700K | 90+ | 2702 | 90 | Opal diffused cover |
| 20W | 3000K / 4000K / 5700K | 90+ | 1674 | 84 | Opal diffused cover | |
| | | | | | | |

General Disclaimer
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+/-5%) of rated value.

Liability Disclaimer
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.
Copyright © LED Lighting 2019. All Rights Reserved.

CAPE TOWN
| 021 510 0028
| sales@ledlighting.co.za

DURBAN
| 031 566 5786
| sales@ledlighting.co.za

JOHANNESBURG
| 011 450 0494
| sales@ledlighting.co.za