



KEY FEATURES

- | Length options: 116mm –2054mm (increments of 102mm)
- | Wattage: 15W/M
- | Housing: Anodised Aluminium
- | Mounting: Magnetic
- | Light colour options: WW (3000K)
- | LED type: Osram Osconiq
- | LED chip efficacy: 165.9 Lumens per watt
- | LED fitting efficacy: 106 Lumens per watt
- | Driver type options: Meanwell / Tridonic / VS / Philips
- | Dimming: Non-dim
- | Warranty: 3 Years

APPLICATIONS

- | Heated food display cabinets

CERTIFICATIONS & FIXTURE RATINGS

ISO9001
CERTIFIED

IP54

3Year
warranty

General Disclaimer
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+/-5%) of rated value.

Liability Disclaimer
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.
Copyright © LED Lighting 2019. All Rights Reserved.



CAPE TOWN
| 021 510 0028
| sales@ledlighting.co.za



DURBAN
| 031 566 5786
| sales@ledlighting.co.za



JOHANNESBURG
| 011 450 0494
| sales@ledlighting.co.za



DIMENSIONS	NAME	VOLTS (V)	DRAW POWER (W)	LENGTH (mm) (increments of 102mm)	WIDTH (mm)	HEIGHT (mm)
		Heat Light	24	15	116 - 2054	20.4

GENERAL SPECIFICATIONS

HEAT LIGHT

GENERAL SPECIFICATIONS	DESCRIPTION	SPECIFICATION
		LED chip type
	LED operating current (mA)	65mA
	LED working life (L70)	50000hrs @ Ta = 80deg C
	Driver manufacturer name	Meanwell / Tridonic / VS / Philips
	Driver input voltage AC(V)	220V - 240V
	Driver power factor (pf)	>0.95λ
	Driver manufacture's nominal-life	>100 000
	Driver dimming type	Non - dim
	Driver Total Harmonic Distortion (THD)	<20%
	IP rating	IP54
	SABS company certification	10089/15954
	Operating temperature range	- 0° C to + 80° C
	Housing material	Extruded Aluminium & extruded silicone
	Product weight including packaging	±0.615kg/m
	Product weight excluding packaging	±0.6kg/m
	Product warranty	3 Years

General Disclaimer

Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+-5%) of rated value.

Liability Disclaimer

The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.

Copyright © LED Lighting 2019. All Rights Reserved.




CAPE TOWN
| 021 510 0028
| sales@ledlighting.co.za



DURBAN
| 031 566 5786
| sales@ledlighting.co.za



JOHANNESBURG
| 011 450 0494
| sales@ledlighting.co.za

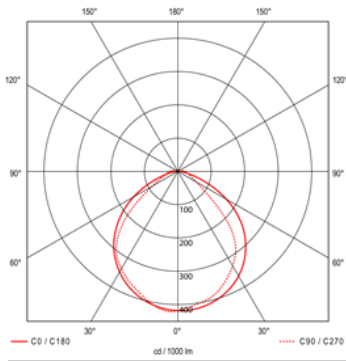

Heat Light 3000K 15W/m

OPTICAL	NAME	DRAW POWER (W)	LED COLOUR (CCT)	COLOUR RENDING INDEX (CRI)	LUMINOUS FLUX (lm)	EFFICIENCY (lm/W)	COVER
		Heat Light	15	3000K	90+	1604	106.9lm/W

General Disclaimer
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+/-5%) of rated value.

Liability Disclaimer
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.
Copyright © LED Lighting 2019. All Rights Reserved.



CAPE TOWN
| 021 510 0028
| sales@ledlighting.co.za



DURBAN
| 031 566 5786
| sales@ledlighting.co.za



JOHANNESBURG
| 011 450 0494
| sales@ledlighting.co.za