


PRODUCT SPECIFICATIONS SHEET

CATEGORY | SURFACE AND SUSPENDED

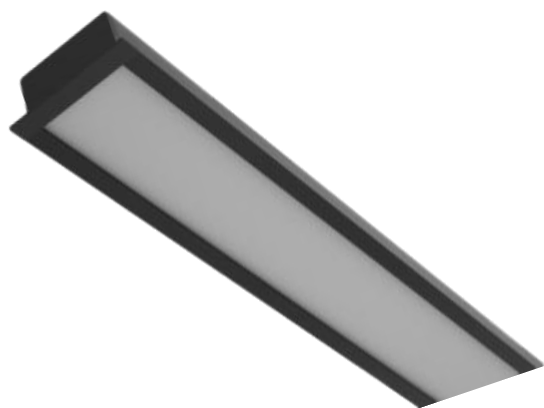

KEY FEATURES


- **Power levels:** 15W/m / 25W/m
- **Luminaire efficacy:** Up to 84lm/W.
- **Heatsink:** Aluminium.
- **Mounting:** Recessed.
- **Luminaire colour options:** White / Black / Custom colour on request.
- **LED lifetime (L80B10):** >75 000 hrs.
- **Dimming options:** DALI, Bluetooth, Touch DIM, 1-10, Triac, PWM
- Luminaire supplied with external driver.

PHOTOMETRICS

LUMINAIRE DATA	NAME	VOLTS (V)	DRAW POWER (W/m)	LENGTH (mm) (INCREMENTS OF 86mm)	LED COLOUR (CCT)	COLOUR RENDERING INDEX (CRI)
	VIRUNGA 50 R	24	15	173mm - 2496mm	2700K, 3500K, 4000K, 5700K	92
LUMINAIRE DATA	VIRUNGA 50 R	24	25	173mm - 2496mm	2700K, 3500K, 4000K, 5700K	92

LUMINAIRE DATA	NAME	DRAW POWER (W/m)	WIDTH (mm)	HEIGHT (mm)	NOMINAL FLUX (LM/m)	LUMINAIRE EFFICACY (LM/W)	MAX CONNECTED LENGTH (m)
	VIRUNGA 50 R	15	50	35	960 - 1260	64-84	6
LUMINAIRE DATA	VIRUNGA 50 R	25	50	35	1600 - 2100	64-84	4

PHOTOMETRICS



VIRUNGA 50 R - DIFFUSED


FIXTURE FEATURES AND WARRANTY



IP20



5Year
WARRANTY

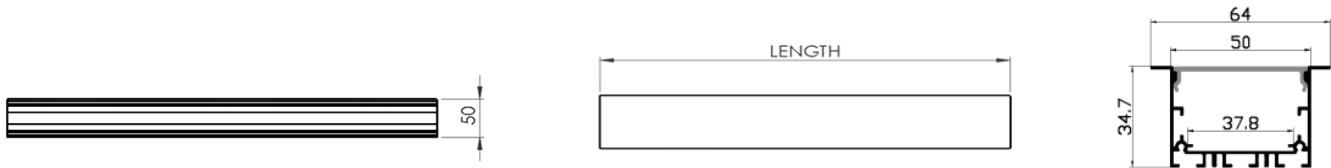

GENERAL SPECIFICATIONS

GENERAL SPECIFICATIONS	DESCRIPTION	SPECIFICATION
	LED chip type	Samsung / Vossloh Schwable
	LED operating voltage	24V
	LED working life (L80B10)	>75 000hrs @ Ta = 25 deg C
	Driver type	External
	Driver dimming	Non - dim/ DALI / Bluetooth / Touch DIM / 1-10 / Triac / PWM
	IP rating	IP20
	SABS company certification	10089/15954
	Operating temperature range	0°C to +40°C
	Housing material	Aluminium/ PMMA

PRODUCT IMAGES

