

PRODUCT SPECIFICATIONS SHEET

CATEGORY | SURFACE AND SUSPENDED




KEY FEATURES

- **Wattage:** Up to 212W.
- **Luminaire efficacy:** Up to 82lm/W.
- **Heatsink:** Chromadek / Aluminium.
- **Mounting:** Surface or suspended.
- **Luminaire colour options:** White / Black / Custom colour on request.
- **LED lifetime (L80B10):** >75 000 hrs.
- **Dimming options:** DALI, Bluetooth, Touch DIM, 1-10, Triac, SPI
- **Custom sizes on request**
- Luminaire supplied with external driver.

PHOTOMETRICS

	NAME	DRAW POWER (W)	LED COLOUR (CCT)	COLOUR RENDERING INDEX (CRI)	LUMINOUS FLUX (LM)	LUMINAIRE EFFICACY (LM/W)	BEAM ANGLE
LUMINAIRE DATA	COMOÉ 900	163 / 177	3000K, 3500K, 4000K, 5000K, RGBW, PIXEL RGBW	90	13366 - 14514	82	120°
	COMOÉ 1200	177 / 196	3000K, 3500K, 4000K, 5000K, RGBW, PIXEL RGBW	90	14514 - 16072	82	120°
	COMOÉ 1500	189 / 212	3000K, 3500K, 4000K, 5000K, RGBW, PIXEL RGBW	90	15498 - 17384	82	120°

PHOTOMETRICS



COMOÉ 120°

FIXTURE FEATURES AND WARRANTY




IP20



5Year
WARRANTY

- X = 900mm; 1200mm; 1500mm
- Width=50mm
- Depth: 60mm

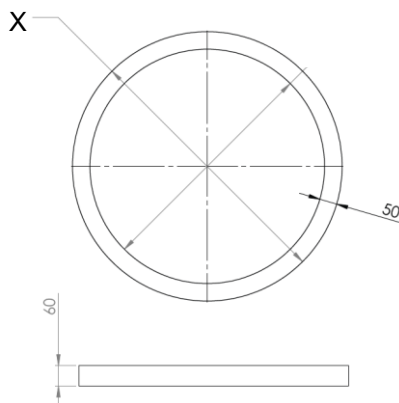

GENERAL SPECIFICATIONS

GENERAL SPECIFICATIONS	DESCRIPTION	SPECIFICATION
	LED chip type	Samsung / Vossloh Schwable
	LED working life (L80B10)	>75 000hrs @ Ta = 25 deg C
	Driver type	External
	Driver dimming	Non - dim / DALI / Bluetooth / Touch DIM / 1-10 / Triac / SPI
	IP rating	IP20
	SABS company certification	10089/15954
	Operating temperature range	0°C to +30°C
	Housing material	Aluminium / Chromedek / Fabric
	Product warranty	5 Years

PRODUCT IMAGES



Perspective view

General Disclaimer

Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+/-5%) of rated value.

Liability Disclaimer

The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.

Copyright © LED Lighting 2019. All Rights Reserved.



CAPE TOWN Head office

| 021 510 0028
| sales@ledlighting.co.za
| 1st Floor Hillwood House
25 Paarden Eiland Road
Paarden Eiland, 7405



JOHANNESBURG Regional Branch

| 021 510 0028
| sales@ledlighting.co.za
| Office Unit 1 Pendoring Office Park,
299 Pendoring Rd, Blackheath,
Randburg, 2195



DURBAN Regional Branch

021 510 0028
sales@ledlighting.co.za