

PRODUCT SPECIFICATIONS SHEET

CATEGORY | FOOD DISPLAY LUMINAIRES




KEY FEATURES

- **Power level up to 15W/m.**
- **Luminaire efficacy:** Up to 100lm/W.
- **Heatsink:** Aluminium.
- **Mounting:** Surface mounted.
- **Luminaire colour options:** White
- **LED lifetime (L80B10):** >75 000 hrs.

PHOTOMETRICS

LUMINAIRE DATA	NAME	DRAW POWER (W)	LED COLOUR (CCT)	COLOUR RENDERING INDEX (CRI)	LUMINOUS FLUX (LM)	LUMINAIRE EFFICACY (LMW)	BEAM ANGLE
	FARO - 568mm	5.2 - 7.6	3000K, 3500K, 4000K ,5700K, M EAT	90	457 - 760	88 - 100	120°
	FARO - 654mm	5.9 - 8.7	3000K, 3500K, 4000K ,5700K, M EAT	90	519 - 870	88 - 100	120°
	FARO - 740mm	6.7 - 9.8	3000K, 3500K, 4000K ,5700K, M EAT	90	589 - 980	88 - 100	120°
	FARO - 826mm	7.4 - 11	3000K, 3500K, 4000K ,5700K, M EAT	90	651 - 1100	88 - 100	120°
	FARO - 912mm	8.2 - 12.1	3000K, 3500K, 4000K ,5700K, M EAT	90	721 - 1210	88 - 100	120°
	FARO - 998mm	8.9 - 13.2	3000K, 3500K, 4000K ,5700K, M EAT	90	783 - 1320	88 - 100	120°
	FARO - 1084mm	9.7 - 14.4	3000K, 3500K, 4000K ,5700K, M EAT	90	853 - 1440	88 - 100	120°
	FARO - 1170mm	10.5 - 15.5	3000K, 3500K, 4000K ,5700K, M EAT	90	924 - 1550	88 - 100	120°
	FARO - 1256mm	11.5 - 17.1	3000K, 3500K, 4000K ,5700K, M EAT	90	1012 - 1710	88 - 100	120°
	FARO - 1342mm	12 - 17.8	3000K, 3500K, 4000K ,5700K, M EAT	90	1056 - 1780	88 - 100	120°
	FARO - 1428mm	12.8 - 18.9	3000K, 3500K, 4000K ,5700K, M EAT	90	1126 - 1890	88 - 100	120°
	FARO - 1514mm	13.6 - 20.1	3000K, 3500K, 4000K ,5700K, M EAT	90	1196 - 2010	88 - 100	120°
	FARO - 1600mm	14.3 - 21.2	3000K, 3500K, 4000K ,5700K, M EAT	90	1258 - 2120	88 - 100	120°




FARO 120°

FIXTURE FEATURES AND WARRANTY



PRODUCT DRAWING DIMENSIONS

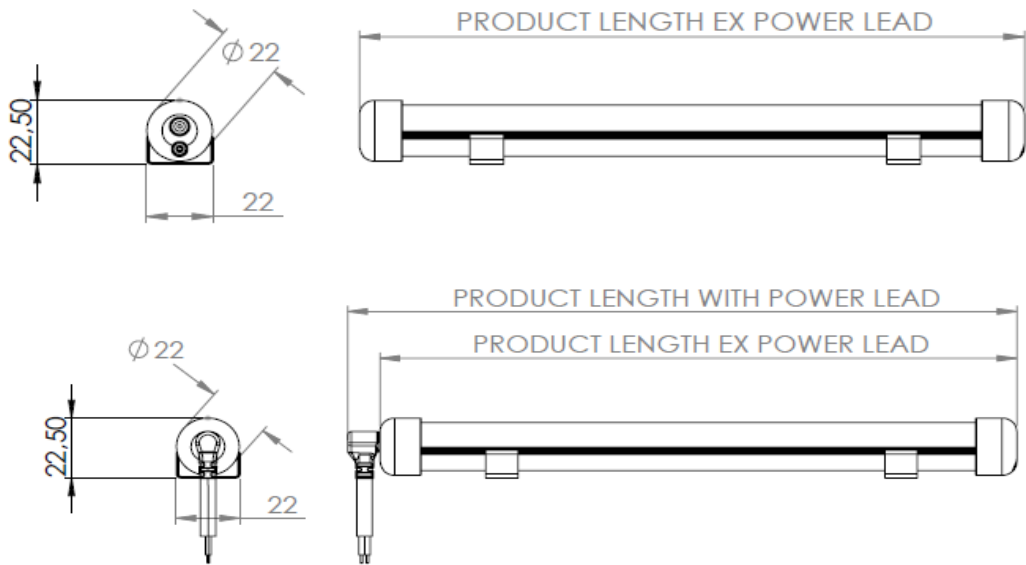

PRODUCT DRAWING DIMENSIONS

GENERAL SPECIFICATIONS	DESCRIPTION	SPECIFICATION
	LED operating voltage	24V
	LED working life (L80B10)	>75 000hrs @ Ta = 25 deg C
	IP rating	IP20
	SABS company certification	10089/15954
	Operating temperature range	0°C to +30°C
	Housing material	Aluminium / Polycarbonate
	Product warranty	5 Years
	Product weight excluding packaging	+/- 0.23kg/m
	Product weight including packaging	+/- 0.30kg/m



Front view



Side view



Top view




Perspective view

ACCESSORIES



Accent mounting clip V11, opaque plastic with accent mounting o-ring, Clear PVC and pan head self taper



Luminis V2 surface bracket, metal with galvanized self drilling truss head



Terry / tool clip, 16mm stainless with pan head self taper



DC plug - black / white - 3.5m lead - 90°