

PRODUCT SPECIFICATIONS SHEET

CATEGORY | SURFACE AND SUSPENDED

KEY FEATURES


- **Wattage:** Up to 120W/m².
- **Luminaire efficacy:** Up to 82lm/W.
- **Heatsink:** Chromadek
- **Mounting:** Surface or suspended.
- **Luminaire colour options:** White / Black / Custom colour on request.
- **LED lifetime (L80B10):** >75 000 hrs.
- **Dimming options:** DALI, Bluetooth, Touch DIM, 1-10, Triac, SPI
- **Custom sizes on request**
- Luminaire supplied with external driver.



PHOTOMETRICS

LUMINAIRE DATA	NAME	DRAW POWER (W)	LED COLOUR (CCT)	COLOUR RENDERING INDEX (CRI)	LUMINOUS FLUX (LM)	LUMINAIRE EFFICACY (LMW)	BEAM ANGLE
	GARAMBA 600X600	44	3000K, 3500K, 4000K, 5000K, RGBW, PIXEL RGBW	90	3608	82	120°
	GARAMBA 600 X 1200	87	3000K, 3500K, 4000K, 5000K, RGBW, PIXEL RGBW	90	7134	82	120°
	GARAMBA 1200X1200	173	3000K, 3500K, 4000K, 5000K, RGBW, PIXEL RGBW	90	14186	82	120°
	GARAMBA 1800X600	130	3000K, 3500K, 4000K, 5000K, RGBW, PIXEL RGBW	90	10920	82	120°
	GARAMBA 1800X1200	260	3000K, 3500K, 4000K, 5000K, RGBW, PIXEL RGBW	90	21320	82	120°
	GARAMBA 2700X1200	389	3000K, 3500K, 4000K, 5000K, RGBW, PIXEL RGBW	90	31898	82	120°

PHOTOMETRICS

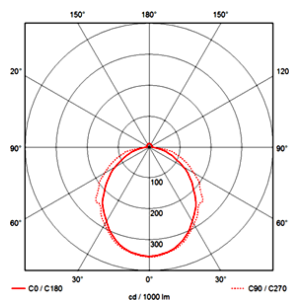

GARAMBA 120°

FIXTURE FEATURES AND WARRANTY




IP20



5Year
WARRANTY

- X = Length
- Y = Width
- Depth: 100mm

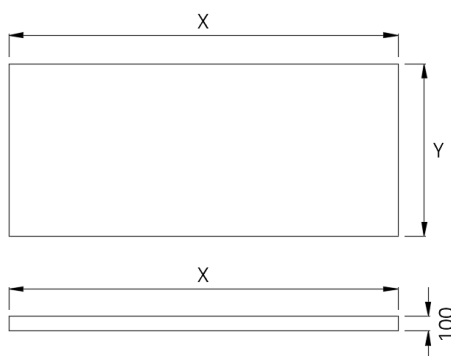

GENERAL SPECIFICATIONS

GENERAL SPECIFICATIONS	DESCRIPTION	SPECIFICATION
	LED chip type	Samsung / Vossloh Schwable
	LED operating voltage	24V
	LED working life (L80B10)	>75 000hrs @ Ta = 25 deg C
	Driver type	External
	Driver dimming	Non - dim / DALI / Bluetooth / Touch DIM / 1-10 / Triac / SPI
	IP rating	IP20
	SABS company certification	10089/15954
	Operating temperature range	0°C to +30°C
	Housing material	Aluminium / Chromedek / Fabric

PRODUCT IMAGES



Perspective view

General Disclaimer

Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+/-5%) of rated value.

Liability Disclaimer

The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.

Copyright © LED Lighting 2019. All Rights Reserved.

CAPE TOWN Head office

| 021 510 0028
| sales@ledlighting.co.za
| 1st Floor Hillwood House
25 Paarden Eiland Road
Paarden Eiland, 7405

JOHANNESBURG Regional Branch

| 021 510 0028
| sales@ledlighting.co.za
| Office Unit 1 Pendoring Office Park,
299 Pendoring Rd, Blackheath,
Randburg, 2195

DURBAN Regional Branch

021 510 0028
sales@ledlighting.co.za