

PRODUCT SPECIFICATIONS SHEET

CATEGORY | OUTDOOR LUMINAIRES




KEY FEATURES

- **Power level up to 85W.**
- **Luminaire efficacy:** 55lm/W.
- **Heatsink:** Aluminium
- **Mounting:** Surface or suspended.
- **Luminaire colour options:** White / Black / Custom colour on request.
- **Driver lifetime:** >100 000 hrs.
- **LED lifetime (L80B10):** >75 000 hrs.
- Luminaire supplied with integrated driver.

PHOTOMETRICS

LUMINAIRE DATA	NAME	DRAW POWER (W)	LED COLOUR (CCT)	COLOUR RENDERING INDEX (CRI)	LUMINOUS FLUX (LM)	LUMINAIRE EFFICACY (LM/W)	PRODUCT LENGTH (mm)	BEAM ANGLE
	GOMBE 900	37	3000K, 3500k, 4000K, 6000K	90	2035	55	880	OPAL
	GOMBE 1200	50	3000K, 3500k, 4000K, 6000K	90	2750	55	1186	OPAL
	GOMBE 1500	63	3000K, 3500k, 4000K, 6000K	90	3465	55	1486	OPAL
	GOMBE 2000	85	3000K, 3500k, 4000K, 6000K	90	4675	55	1986	OPAL

PHOTOMETRICS



GOMBE - OPAL


FIXTURE FEATURES AND WARRANTY



IP65



5Year
WARRANTY

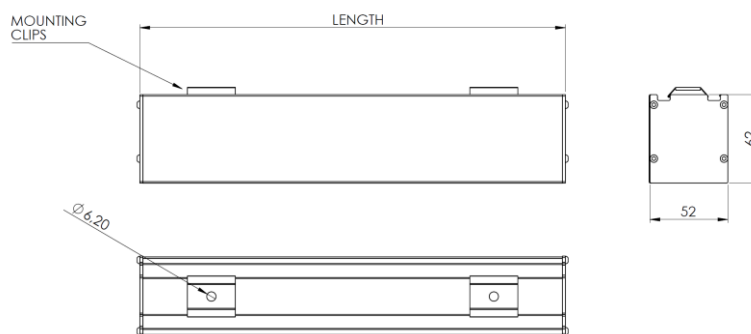

GENERAL SPECIFICATIONS

GENERAL SPECIFICATIONS	DESCRIPTION	SPECIFICATION
	LED chip type	Samsung
	LED operating voltage	24V
	LED working life (L80B10)	>75 000hrs @ Ta = 25 deg C
	Driver type	Tridonic / Vossloh Schwable / TCI /
	Driver input voltage	220V - 240V
	Driver power factor	>0.95λ
	Driver nominal life	100 000hrs @ Ta = 25 deg C
	Driver dimming	Non - dim / DALI / Touch DIM
	Driver Total Harmonic Distortion (THD)	<20%
	Driver surge protection (KV)	2KV
	Driver compliance	EN 61347-2-13:2006
	IP rating	IP65
	SABS company certification	10089/15954
	Operating temperature range	-20°C to +40°C
	Housing material	Aluminium / PMMA
	Product warranty	5 Years
	Product weight excluding packaging	+/- 3kg/m
	Product weight including packaging	+/- 3,2kg/m

PRODUCT IMAGES



Perspective view

General Disclaimer

Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+5%) of rated value.

Liability Disclaimer

The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.

Copyright © LED Lighting 2019. All Rights Reserved.

CAPE TOWN Head office

| 021 510 0028
| sales@ledlighting.co.za
| 1st Floor Hillwood House
25 Paarden Eiland Road
Paarden Eiland, 7405

JOHANNESBURG Regional Branch

| 021 510 0028
| sales@ledlighting.co.za
| Office Unit 1 Pendoring Office Park,
299 Pendoring Rd, Blackheath,
Randburg, 2195

DURBAN Regional Branch

021 510 0028
| sales@ledlighting.co.za