

PRODUCT SPECIFICATIONS SHEET

CATEGORY | TRACK AND SPOT LUMINAIRES




KEY FEATURES

- Power level up to 55W/m.
- Luminaire efficacy: Up to 135lm/W.
- Heatsink: Aluminium
- Mounting: 4-Wire Track system.
- Luminaire colour options: White / Black / Custom colour on request.
- Driver lifetime: >100 000 hrs.
- LED lifetime (L80B10): >75 000 hrs.
- Luminaire supplied with integrated driver.

PHOTOMETRICS

LUMINAIRE DATA	NAME	DRAW POWER (W)	LED COLOUR (CCT)	COLOUR RENDERING INDEX (CRI)	LUMINOUS FLUX (LM)	LUMINAIRE EFFICACY (LM/W)	PRODUCT LENGTH (mm)	BEAM ANGLE
	KALAHARI T 900	32 / 54	3000K, 3500K, 4000K ,5700K	92	3840 - 7290	120-135	848mm	PRISMATIC
	KALAHARI T 1200	41/ 65	3000K, 3500K, 4000K ,5700K	92	4920 - 8775	120-135	1133mm	PRISMATIC
	KALAHARI T 1500	38 / 48	3000K, 3500K, 4000K ,5700K	92	4560 - 6480	120-135	1415mm	PRISMATIC
	KALAHARI T 2200	56 / 76	3000K, 3500K, 4000K ,5700K	92	6720 - 10260	120-135	2250mm	PRISMATIC

PHOTOMETRICS



KALAHARI T- PRISMATIC


FIXTURE FEATURES AND WARRANTY



IP20



5Year
WARRANTY

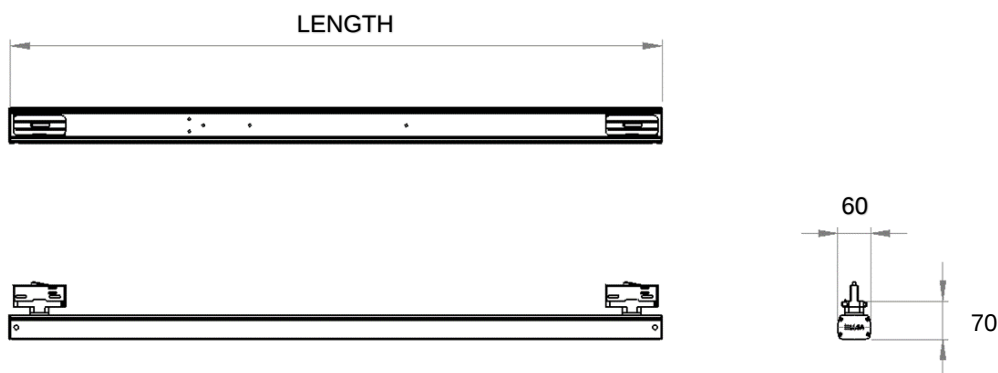

GENERAL SPECIFICATIONS

GENERAL SPECIFICATIONS	DESCRIPTION	SPECIFICATION
	LED chip type	Samsung
	LED operating current	300mA
	LED working life (L80B10)	>75 000hrs @ Ta = 25 deg C
	Driver type	Tridonic / Vossloh Schwabe / TCI
	Driver input voltage	110V - 230V
	Driver power factor	>0.95λ
	Driver nominal life	100 000hrs @ Ta = 25 deg C
	Driver dimming	Non - dim
	Driver Total Harmonic Distortion (THD)	<20%
	Driver surge protection (KV)	2KV
	Driver compliance	EN 61347-2-13:2006
	IP rating	IP20
	SABS company certification	10089/15954
	Operating temperature range	0°C to +40°C
	Housing material	Aluminium / PMMA
	Product warranty	5 Years
	Product weight excluding packaging	+/- 132kg/m
	Product weight including packaging	+/- 134kg/m

PRODUCT IMAGES



Front view



Sider view



Top view



Perspective view

General Disclaimer
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+5%) of rated value.

Liability Disclaimer
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.
Copyright © LED Lighting 2019. All Rights Reserved.

CAPE TOWN
Head office
| 021 510 0028
| sales@ledlighting.co.za
| 1st Floor Hillwood House
25 Paarden Eiland Road
Paarden Eiland, 7405

JOHANNESBURG
Regional Branch
| 021 510 0028
| sales@ledlighting.co.za
| Office Unit 1 Pendoring Office Park,
299 Pendoring Rd, Blackheath,
Randburg, 2195

DURBAN
Regional Branch
021 510 0028
sales@ledlighting.co.za