

PRODUCT SPECIFICATIONS SHEET CATEGORY | HIGHBAY & LOWBAY LUMINAIRES




KEY FEATURES

- Power level up to 200W.
- Luminaire efficacy: Up to 140lm/W.
- Heatsink: Aluminium.
- Mounting: Suspended.
- Luminaire colour options: Black.
- Driver lifetime: >100 000 hrs.
- LED lifetime (L80B10): >75 000 hrs.
- Dimming options: 0 – 10V.
- Luminaire supplied with integrated driver.


PHOTOMETRICS

LUMINAIRE DATA	NAME	DRAW POWER (W)	LED COLOUR (CCT)	COLOUR RENDERING INDEX (CRI)	LUMINOUS FLUX (LM)	LUMINAIRE EFFICACY (LMW)	BEAM ANGLE
	KAMUKU	150	4000	80	21000	140	60°/90°
	KAMUKU	200	4000	80	28000	140	60°/90°

PHOTOMETRICS



KAMUKU - 60°



KAMUKU - 90°


FIXTURE FEATURES AND WARRANTY




IP65



5Year
WARRANTY

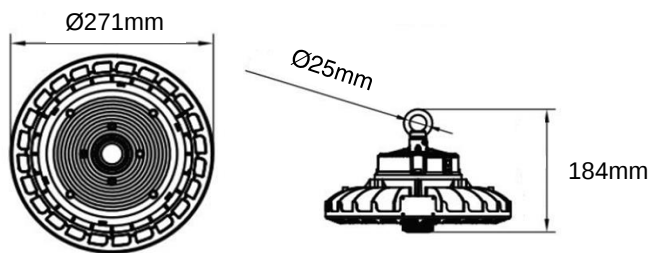

KAMUKU 150W

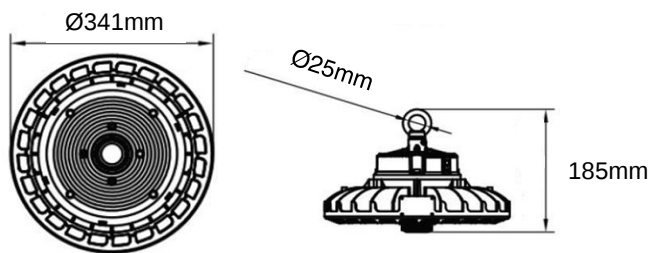


KAMUKU 200W

GENERAL SPECIFICATIONS

DESCRIPTION	SPECIFICATION
LED chip type	Epistar 2385
LED operating current	120mA
LED working life (L80B10)	>75 000hrs @ Ta = 25 deg C
Driver type	Lifud
Driver input voltage	110V - 230V
Driver power factor	>0.95λ
Driver nominal life	100 000hrs @ Ta = 25 deg C
Driver dimming	0 - 10V
Driver Total Harmonic Distortion (THD)	<20%
Driver surge protection (KV)	2KV
Driver compliance	EN 61347-2-13:2006
IP rating	IP65
SABS company certification	10089/15954
Operating temperature range	-30°C to +50°C
Housing material	Aluminium / Plastic
Product warranty	5 Years
Product weight excluding packaging	+/- 4.5kg
Product weight including packaging	+/- 4.9kg

PRODUCT IMAGES



Front view



Side view



Perspective view

General Disclaimer
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+/-5%) of rated value.

Liability Disclaimer
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.
Copyright © LED Lighting 2019. All Rights Reserved.

CAPE TOWN
Head office
| 021 510 0028
| sales@ledlighting.co.za
| 1st Floor Hillwood House
25 Paarden Eiland Road
Paarden Eiland, 7405

JOHANNESBURG
Regional Branch
| 021 510 0028
| sales@ledlighting.co.za
| Office Unit 1 Pendoring Office Park,
299 Pendoring Rd, Blackheath,
Randburg, 2195

DURBAN
Regional Branch
021 510 0028
sales@ledlighting.co.za