

PRODUCT SPECIFICATIONS SHEET

CATEGORY | SURFACE AND SUSPENDED




KEY FEATURES

- Power levels up to 38W/m.
- Luminaire efficacy: Up to 134lm/W.
- Heatsink: Aluminium
- Mounting: Surface or suspended.
- Luminaire colour options: White / Black / Custom colour on request.
- Driver lifetime: >100 000 hrs.
- LED lifetime (L80B10): >75 000 hrs.
- Dimming options: DALI, Bluetooth.
- End to end integration.
- Luminaire supplied with integrated driver.

PHOTOMETRICS

LUMINAIRE DATA	NAME	DRAW POWER (W)	LED COLOUR (CCT)	COLOUR RENDERING INDEX (CRI)	LUMINOUS FLUX (LM)	LUMINAIRE EFFICACY (LM/W)	PRODUCT LENGTH (mm)	BEAM ANGLE
	MASSAI ETE 1200	21 / 32 / 42	3000K, 3500K, 4000K, 5700K	92	2310 - 5628	110 - 134	1109	OPAL
	MASSAI ETE 1500	27 / 40 / 53	3000K, 3500K, 4000K, 5700K	92	2970 - 7102	110 - 134	1386	OPAL
	MASSAI ETE 2200	42 / 63 / 84	3000K, 3500K, 4000K, 5700K	92	4620 - 11256	110 - 134	2218	OPAL
	MASSAI ETE 590x590	21 / 32 / 42	3000K, 3500K, 4000K, 5700K	92	2310 - 5628	110 - 134	590x590	OPAL
	MASSAI ETE 590x865	27 / 40 / 53	3000K, 3500K, 4000K, 5700K	92	2970 - 7102	110 - 134	590x865	OPAL

PHOTOMETRICS



MASSAI - OPAL


FIXTURE FEATURES AND WARRANTY



IP20



5Year
WARRANTY

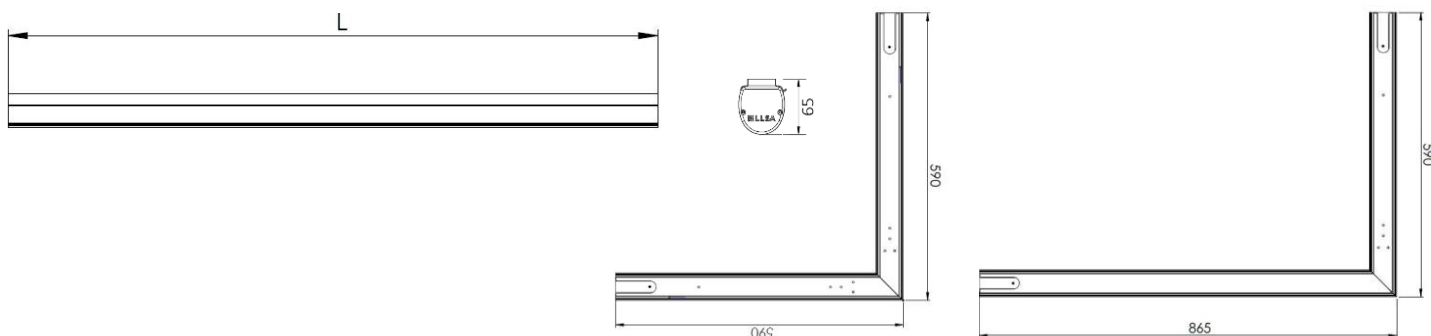

GENERAL SPECIFICATIONS

DESCRIPTION	SPECIFICATION
LED chip type	Samsung / Vossloh Schwable
LED operating current	200 - 400mA
LED working life (L80B10)	>75 000hrs @ Ta = 25 deg C
Driver type	Tridonic / Vossloh Schwable / TCI
Driver input voltage	110V - 230V
Driver power factor	>0.95λ
Driver nominal life	100 000hrs @ Ta = 25 deg C
Driver dimming	Non - dim / DALI / Bluetooth
Driver Total Harmonic Distortion (THD)	<20%
Driver surge protection (KV)	2KV
Driver compliance	EN 61347-2-13:2006
IP rating	IP20
SABS company certification	10089/15954
Operating temperature range	0°C to +40°C
Housing material	Aluminium / PMMA
Product warranty	5 Years
Product weight excluding packaging	+/- 12kg
Product weight including packaging	+/- 14kg

PRODUCT IMAGES



Front view



Rear view



Top view



Perspective view

General Disclaimer

Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+5%) of rated value.

Liability Disclaimer

The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.

Copyright © LED Lighting 2019. All Rights Reserved.

CAPE TOWN Head office

| 021 510 0028
| sales@ledlighting.co.za
| 1st Floor Hillwood House
25 Paarden Eiland Road
Paarden Eiland, 7405

JOHANNESBURG Regional Branch

| 021 510 0028
| sales@ledlighting.co.za
| Office Unit 1 Pendoring Office Park,
299 Pendoring Rd, Blackheath,
Randburg, 2195

DURBAN Regional Branch

021 510 0028
sales@ledlighting.co.za