

PRODUCT SPECIFICATIONS SHEET

CATEGORY | OUTDOOR LUMINAIRES




KEY FEATURES

- **LED – GU10**
- **Luminaire efficacy:** Up to 110lm/W.
- **Mounting:** Planted or plinth mounted.
- **Luminaire color options:** Grey/ Black / Custom color on request.
- **Driver lifetime:** >100 000 hrs.
- **LED lifetime (L80B10):** >75 000 hrs.

PHOTOMETRICS

LUMINAIRE DATA	NAME	DRAW POWER (W)	LED COLOUR (CCT)	COLOUR RENDERING INDEX (CRI)	LUMINOUS FLUX (LM)	LUMINAIRE EFFICACY (LM/W)	BEAM ANGLE
	NINI	GU10	3000K, 4000K	92	630 - 770	90 - 110	OPAL

PHOTOMETRICS

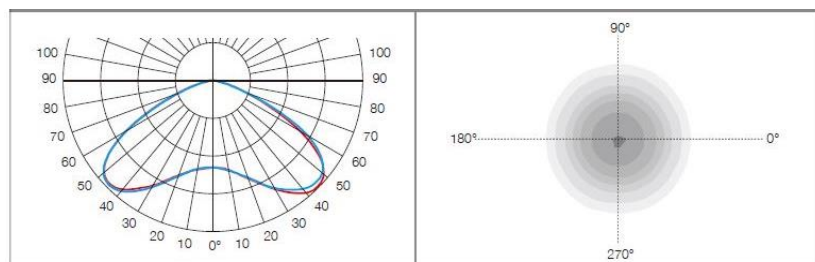

NINI - OPAL


FIXTURE FEATURES AND WARRANTY



IP44



5Year
WARRANTY

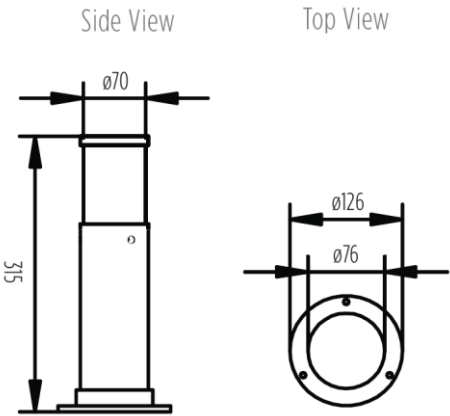

GENERAL SPECIFICATIONS

GENERAL SPECIFICATIONS	DESCRIPTION	SPECIFICATION
	LED chip type	Vossloh Schwable
	LED working life (L80B10)	>75 000hrs @ Ta = 25 deg C
	Driver type	Vossloh Schwable / TCI
	Driver input voltage	110V - 230V
	Driver power factor	>0.95λ
	Driver nominal life	100 000hrs @ Ta = 25 deg C
	Driver Total Harmonic Distortion (THD)	<20%
	Driver surge protection (KV)	2KV
	Driver compliance	EN 61347-2-13:2006
	IP rating	IP44
	Housing material	Aluminium / Plastic
	Product warranty	5 Years

PRODUCT IMAGES



Perspective view

General Disclaimer
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+/-5%) of rated value.

Liability Disclaimer
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.

Copyright © LED Lighting 2019. All Rights Reserved.

CAPE TOWN
Head office

| 021 510 0028
| sales@ledlighting.co.za
| 1st Floor Hillwood House
25 Paarden Eiland Road
Paarden Eiland, 7405

JOHANNESBURG
Regional Branch

| 021 510 0028
| sales@ledlighting.co.za
| Office Unit 1 Pendoring Office Park,
299 Pendoring Rd, Blackheath,
Randburg, 2195

DURBAN
Regional Branch

021 510 0028
sales@ledlighting.co.za