

**PRODUCT SPECIFICATIONS SHEET**

**CATEGORY | STRIPLIGHT LUMINAIRES**



**KEY FEATURES**


- **Power levels:** 14.4W/m
- **Luminaire efficacy:** Up to 120lm/W.
- **Mounting:** Surface.
- **Dimming options:** DALI, Bluetooth, Touch DIM, 1-10, Triac, PWM.
- Luminaire supplied with external driver.

**PHOTOMETRICS**

| LUMINAIRE DATA | NAME | VOLTS (V) | DRAW POWER (W/m) | LENGTH (mm)<br>(INCREMENTS OF 33mm) | LED COLOUR (CCT)           | COLOUR RENDERING INDEX (CRI) |
|----------------|------|-----------|------------------|-------------------------------------|----------------------------|------------------------------|
|                | RUMA | 24        | 14.4             | 382mm - 1948mm                      | 3000K, 3500K, 4000K, 5700K | 92                           |

| LUMINAIRE DATA | NAME | DRAW POWER (W/m) | WIDTH (mm) | HEIGHT (mm) | NOMINAL FLUX (LM/m) | LUMINAIRE EFFICACY (LM/W) | MAX CONNECTED LENGTH (m) |
|----------------|------|------------------|------------|-------------|---------------------|---------------------------|--------------------------|
|                | RUMA | 14.4             | 19.25      | 7           | 1296 - 1728         | 90 - 120                  | 5                        |

**PHOTOMETRICS**



**RUMA – DIFFUSED**


**FIXTURE FEATURES AND WARRANTY**



**IP20**



**5Year**  
WARRANTY

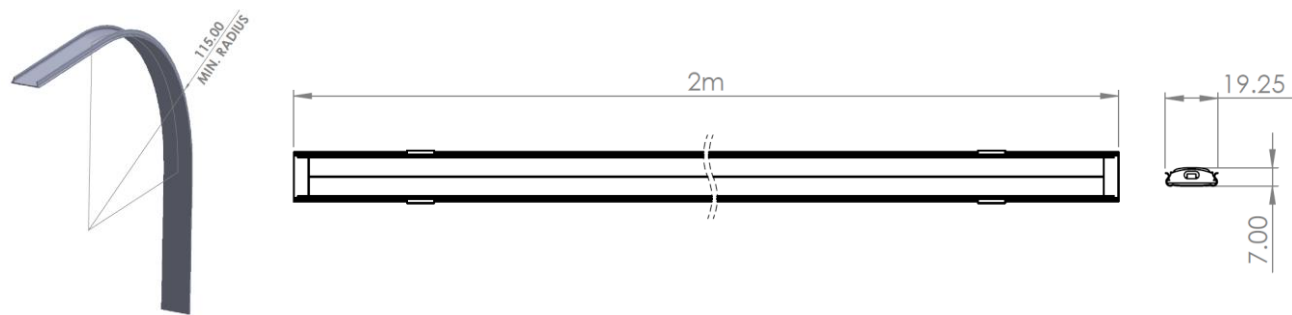

GENERAL SPECIFICATIONS

| GENERAL SPECIFICATIONS | DESCRIPTION                 | SPECIFICATION                                                 |
|------------------------|-----------------------------|---------------------------------------------------------------|
|                        | LED chip type               | Samsung                                                       |
|                        | LED operating voltage       | 24V                                                           |
|                        | LED working life (L80B10)   | >75 000hrs @ Ta = 25 deg C                                    |
|                        | Driver type                 | External                                                      |
|                        | Driver dimming              | Non - dim / DALI / Bluetooth / Touch DIM / 1-10 / Triac / PWM |
|                        | IP rating                   | IP20                                                          |
|                        | SABS company certification  | 10089/15954                                                   |
|                        | Operating temperature range | 0°C to +40°C                                                  |
|                        | Housing material            | Aluminium / PMMA                                              |

PRODUCT IMAGES



Perspective view

**General Disclaimer**  
 Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+/-5%) of rated value.

**Liability Disclaimer**  
 The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.

Copyright © LED Lighting 2019. All Rights Reserved.

**CAPE TOWN**  
**Head office**  
 | 021 510 0028  
 | [sales@ledlighting.co.za](mailto:sales@ledlighting.co.za)  
 | 1st Floor Hillwood House  
 25 Paarden Eiland Road  
 Paarden Eiland, 7405

**JOHANNESBURG**  
**Regional Branch**  
 | 021 510 0028  
 | [sales@ledlighting.co.za](mailto:sales@ledlighting.co.za)  
 | Office Unit 1 Pendoring Office Park,  
 299 Pendoring Rd, Blackheath,  
 Randburg, 2195

**DURBAN**  
**Regional Branch**  
 021 510 0028  
[sales@ledlighting.co.za](mailto:sales@ledlighting.co.za)