

PRODUCT SPECIFICATIONS SHEET

CATEGORY | EXTRA PROTECTION LUMINAIRES




KEY FEATURES

- **Wattage and CCT selectable.**
- **Luminaire efficacy:** Up to 105lm/W.
- **Mounting:** Surface.
- **Luminaire colour options:** White / Black.
- **Driver lifetime:** >100 000 hrs.
- **LED lifetime (L80B10):** >75 000 hrs.
- **Dimming options:** DALI
- Luminaire supplied with integrated driver.

PHOTOMETRICS

LUMINAIRE DATA	NAME	DRAW POWER (W)	LED COLOUR (CCT)	COLOUR RENDERING INDEX (CRI)	LUMINOUS FLUX (LM)	LUMINAIRE EFFICACY (LMM)	BEAM ANGLE
	TSISTSIKAMMA SQ	12	3000K, 4000K, 6000K	>83	1140 - 1260	95 - 105	OPAL
	TSISTSIKAMMA SQ	18	3000K, 4000K, 6000K	>83	1710 - 1890	95 - 105	OPAL
	TSISTSIKAMMA SQ	24	3000K, 4000K, 6000K	>83	2280 - 2520	95 - 105	OPAL

PHOTOMETRICS



TSISTSIKAMMA SQ - OPAL

FIXTURE FEATURES AND WARRANTY




IP65

IK08



5Year
WARRANTY

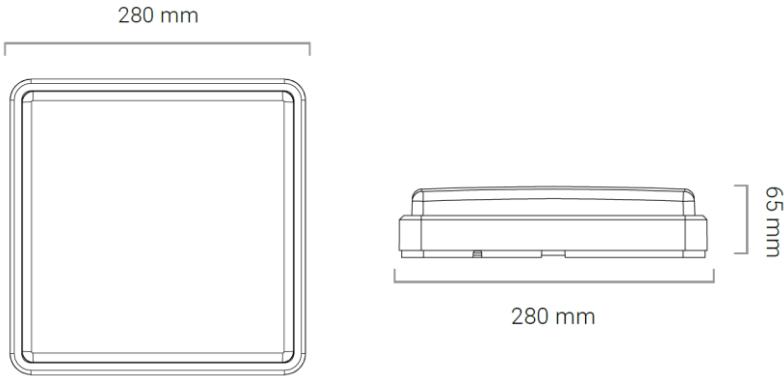

GENERAL SPECIFICATIONS

GENERAL SPECIFICATIONS	DESCRIPTION	SPECIFICATION
	LED chip type	Sanan
	LED working life (L70B50)	>50 000hrs @ Ta= 25 deg C
	Driver type	Integrated driver
	Driver input voltage	185V - 265V
	Driver power factor	>0.95λ
	Driver nominal life	50 000hrs @ Ta= 25 deg C
	Driver dimming	Non - dim
	Driver Total Harmonic Distortion (THD)	<20%
	Driver surge protection (KV)	1KV
	Driver compliance	EN 61347-2-13:2006
	IP rating	IP65
	SABS company certification	10089/15954
	Operating temperature range	-20° C to + 45° C
	Housing material	Polycarbonate
	Product warranty	5 Years
	Product weight excluding packaging	+/- 133kg
	Product weight including packaging	+/- 157kg

PRODUCT IMAGES



Perspective view

General Disclaimer
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation(+/-5%) of rated value.

Liability Disclaimer
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.

Copyright © LED Lighting 2019. All Rights Reserved.

CAPE TOWN
Head office
| 021 510 0028
| sales@ledlighting.co.za
| 1st Floor Hillwood House
25 Paarden Eiland Road
Paarden Eiland, 7405

JOHANNESBURG
Regional Branch
| 021 510 0028
| sales@ledlighting.co.za
| Office Unit 1 Pendoring Office Park,
299 Pendoring Rd, Blackheath,
Randburg, 2195

DURBAN
Regional Branch
021 510 0028
sales@ledlighting.co.za