


PRODUCT SPECIFICATIONS SHEET

CATEGORY | SURFACE AND SUSPENDED

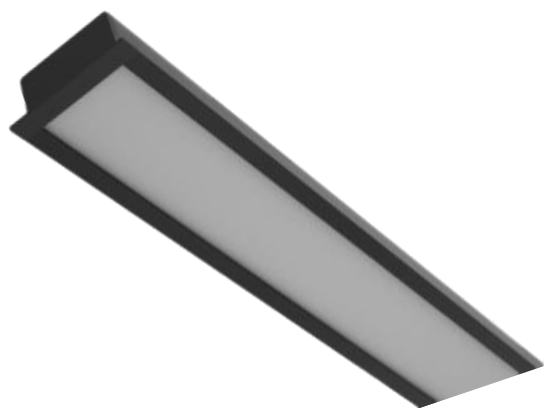

KEY FEATURES


- **Power levels:** 15W/m / 25W/m
- **Luminaire efficacy:** Up to 84lm/W.
- **Heatsink:** Aluminium.
- **Mounting:** Recessed.
- **Luminaire colour options:** White / Black / Custom colour on request.
- **LED lifetime (L80B10):** >75 000 hrs.
- **Dimming options:** DALI, Bluetooth, Touch DIM, 1-10, Triac, PWM
- Luminaire supplied with external driver.

PHOTOMETRICS

LUMINAIRE DATA	NAME	VOLTS (V)	DRAW POWER (W/m)	LENGTH (mm) (INCREMENTS OF 86mm)	LED COLOUR (CCT)	COLOUR RENDERING INDEX (CRI)
	ZAM BEZI 35 R	24	15	174mm - 2496mm	2700K, 3500K, 4000K,5700K	92
LUMINAIRE DATA	ZAM BEZI 35 R	24	25	174mm - 2496mm	2700K, 3500K, 4000K ,5700K	92

LUMINAIRE DATA	NAME	DRAW POWER (W/m)	WIDTH (mm)	HEIGHT (mm)	NOMINAL FLUX (LM/m)	LUMINAIRE EFFICACY (LMW)	MAX CONNECTED LNTH (m)
	ZAM BEZI 35 R	15	44	35	960 - 1260	64-84	6
LUMINAIRE DATA	ZAM BEZI 35 R	25	44	35	1600 - 2100	64-84	4

PHOTOMETRICS



ZAMBEZI 35 R - DIFFUSED


FIXTURE FEATURES AND WARRANTY



IP20



5Year
WARRANTY

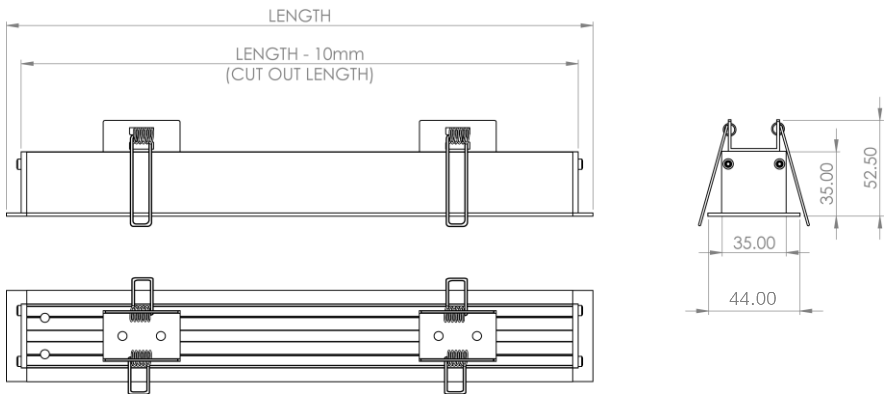


GENERAL SPECIFICATIONS

GENERAL SPECIFICATIONS

DESCRIPTION	SPECIFICATION
LED chip type	Samsung / Vossloh Schwable
LED operating voltage	24V
LED working life (L80B10)	>75 000hrs @ Ta = 25 deg C
Driver type	External
Driver dimming	Non - dim/ DALI / Bluetooth / Touch DIM / 1-10 / Triac / PWM
IP rating	IP20
SABS company certification	10089/15954
Operating temperature range	0°C to +40°C
Housing material	Aluminium / PMMA

PRODUCT IMAGES

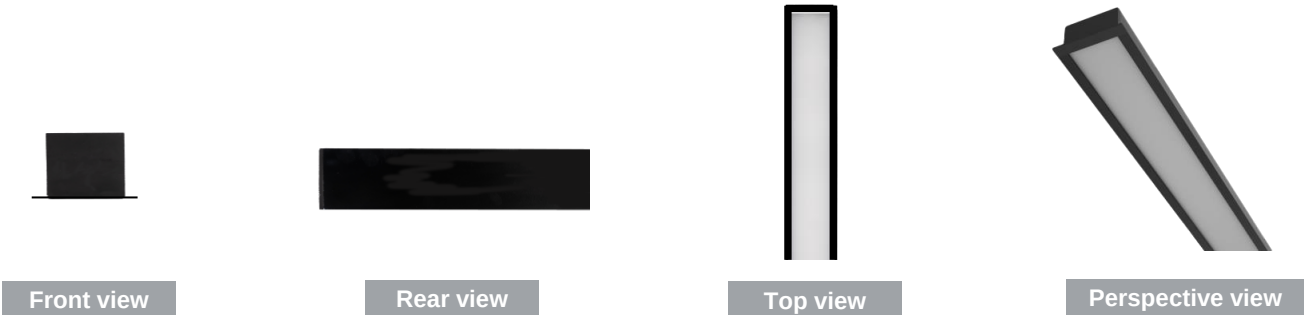

General Disclaimer
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+/-5%) of rated value.

Liability Disclaimer
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.
Copyright © LED Lighting 2019. All Rights Reserved.

CAPE TOWN
Head office
| 021 510 0028
| sales@ledlighting.co.za
| 1st Floor Hillwood House
25 Paarden Eiland Road
Paarden Eiland, 7405

JOHANNESBURG
Regional Branch
| 021 510 0028
| sales@ledlighting.co.za
| Office Unit 1 Pendoring Office Park,
299 Pendoring Rd, Blackheath,
Randburg, 2195

DURBAN
Regional Branch
021 510 0028
sales@ledlighting.co.za